



PeopleMover v.4.3

The PeopleMover is a next-generation electric personal transport solution that redefines mobility in various segments. Designed for safety, comfort, and efficiency, it enables employees to move up to three times faster than walking, reducing time loss, fatigue, and inefficiency. Developed by SoFlow Mobility (Switzerland) and distributed through the Movexx dealer network, the PeopleMover combines high-end engineering with proven service and support, delivering reliable, efficient mobility for modern industries.

Performance

With a powerful 350W motor, 200kg load capacity, and a 48V/15Ah Li-ion battery, the PeopleMover delivers performance built for demanding industrial environments. The action range of up to 30km will give you enough power to run all of your errands, while the wide platform and solid chassis ensure a stable, comfortable ride, even on longer routes.

Comfort

The ergonomic platform, intuitive controls, and large color display make the PeopleMover easy to operate for users of all experience levels. Smooth acceleration, stable steering, and low vibration deliver a comfortable and controlled ride. The built-in charger lets you charge the PeopleMover from any available outlet. The optional swappable battery gives you round the clock operation.

Safety

The PeopleMover prioritizes operator and workplace safety. Its five-point wheel system prevents tipping, and the dual braking system (electronic and mechanical drum brakes) ensures secure stopping. 360° LED lighting, directional indicators, and brake light signals provide full visibility. A dead-man switch instantly stops the vehicle if released, ensuring maximum operator protection. The projected blue spot warns other traffic in advance.

Reliability

Manufactured by SoFlow Mobility and supported through the Movexx dealer network, the PeopleMover ensures both technical excellence and dependable service. Movexx offers local availability, spare parts, customer support and service through its established international dealer network.



STANDARD / OPTIONAL EQUIPMENT

STANDARD

- Factory speed setting 12km/h (7.5 mph)
- Motor power: 350W
- Max. load capacity: 200kg (440 lbs)
- Battery: 48V/15Ah Li-ion
- Range per battery charge: up to 30km (18.5 miles)
- Built-in charger: 100-240V/AC, output: 54.6V, 3A
- Charging time: approx. 5 hours
- Brake system: electronic and mechanical drum brake
- Climbing capacity: up to 20% (unloaded)
- Lighting: certified front light, 360° LED light strips with brake and turn signals, blue spot light.
- Display: color LCD with system information and ERP connectivity option
- Safety: dead-man switch, full lighting visibility, 5-point wheel system
- Construction: robust frame, wide platform

OPTIONAL

- Movexx adapter for PeopleMover to mount various Movexx pins and hooks
- Extra battery and external battery charger



Advantages

- Up to 75% time savings on internal walking routes
- 3 times faster than walking, improving productivity and reducing operator fatigue
- Fast ROI: within months through time efficiency
- Low total cost of ownership through durable components and minimal maintenance
- Enhanced workplace safety thanks to stability, lighting, and smart braking systems
- Plug & play deployment makes it easy to integrate into existing workflows
- Supported worldwide via the Movexx dealer network with SoFlow service expertise




TECHNICAL DATA PEOPLEMOVER 4.3

According to VDI 2198 in SI units.**

Characteristics	1.1	Manufacturer			SoFlow
	1.2	Manufacturer's type designation			PeopleMover 4.3
	1.3	Drive			Electric with Li-Ion Battery
	1.4	Operator type			Platform
	1.5	Rated capacity/rated load		Q [t]	0.2 (operator + load < 200kg)
	1.9	Wheelbase		y [mm]	627
Wt	2.1	Weight incl. battery		kg	57
	2.2	Axle load with load (80kg person)	front/rear	kg	32/105
Tyres/Chassis	3.1	Tyres front/rear	front/rear	Solid Rubber	
	3.2	Tyres size	front	mm	220x55
	3.3	Tyres size	rear	mm	80x40
	3.4	Wheels, number (x = driven wheels)	front/rear	1/x4	
	3.6	Tread width	front/rear	b ₁₀ /b ₁₁ [mm]	0/412
Dimensions	4.8	Stand height		h ₇ [mm]	98
	4.9	Tiller height min-max		h ₁₄ [mm]	1165
	4.19	Overall length		l ₁ [mm]	992
	4.21	Overall width		b ₁ [mm]	607
	4.32	Ground clearance, center of wheel base		m ₂ [mm]	34
	4.35	Turning radius		Wa [mm]	1134
Performance	5.1*	Travel speeds forwards	with/without load	km/h	12/12
	5.1.1	Travel speed backwards	with/without load	km/h	6/6
	5.8	Maximum slope (5 Min)	with/without load	%	0/20
	5.10	Service brake			
Drive	6.1	Drive motor output (S2 = 60 min)		kW	0.35
	6.4	Battery voltage/nominal capacity		V/Ah	48/15
	6.5	Battery weight		kg	5.4
Other	8.1	Type of drive unit			DC
	10.7	Sound level at operator's ear		dB(A)	<68

* Note! Check local legislation if driving license or certification is required.

** All values in this table have a tolerance of +/- 5%.

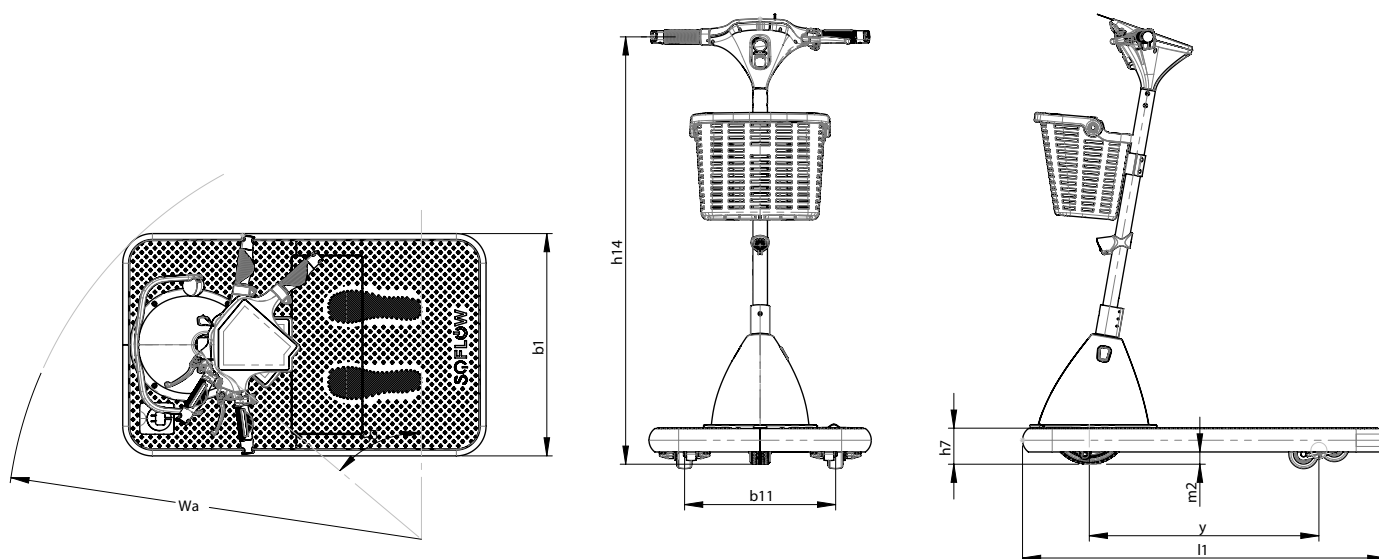


TECHNICAL DATA PEOPLEMOVER 4.3

According to VDI 2198 in USCS units.**

Characteristics	1.1	Manufacturer			SoFlow
	1.2	Manufacturer's type designation			PeopleMover 4.3
	1.3	Drive			Electric with Li-Ion Battery
	1.4	Operator type			Platform
	1.5	Rated capacity/rated load	Q [tn(US)]	0.22 (operator + load < 440 lbs)	
	1.9	Wheelbase	y [in]	24.7	
Wt	2.1	Weight incl. battery	lb	126	
	2.2	Axle load with load (176 lbs person)	front/rear	lb	71/231
Tyres/Chassis	3.1	Tyres front/rear	front/rear	Solid Rubber	
	3.2	Tyres size	front	in	8.66x2.17
	3.3	Tyres size	rear	in	3.15x1.58
	3.4	Wheels, number (x = driven wheels)	front/rear	1/x4	
	3.6	Tread width	front/rear	b ₁₀ /b ₁₁ [in]	0/16.2
Dimensions	4.8	Stand height	h ₇ [in]		3.9
	4.9	Tiller height min-max	h ₁₄ [in]		45.9
	4.19	Overall length	l ₁ [in]		39.1
	4.21	Overall width	b ₁ [in]		23.9
	4.32	Ground clearance, center of wheel base	m ₂ [in]		1.3
	4.35	Turning radius	Wa [in]		44.7
Performance	5.1*	Travel speeds forwards	with/without load	mph	7.5/7.5
	5.1.1	Travel speed backwards	with/without load	mph	3.7/3.7
	5.8	Maximum slope (5 Min)	with/without load	%	0/20
	5.10	Service brake	Electromagnetic		
Drive	6.1	Drive motor output (S2 = 60 min)	hp		0.47
	6.4	Battery voltage/nominal capacity	V/Ah		48/15
	6.5	Battery weight	lb		11.9
Other	8.1	Type of drive unit	DC		
	10.7	Sound level at operator's ear	dB(A)		<68

* Note! Check local legislation if driving license or certification is required.

** All values in this table have a tolerance of +/- 5%.

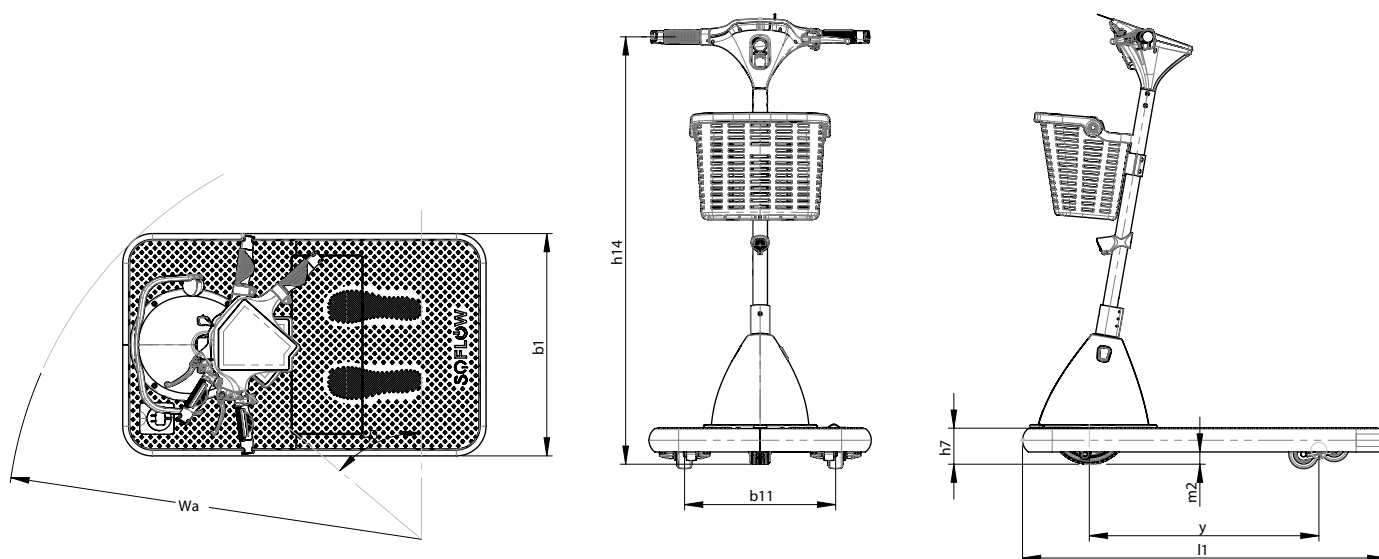



Movexx International BV. reserves the right to make adjustments to this publication at any time, without notice or obligation. Data in this publication are for reference use only. It is the responsibility of the reader of this information to verify any and all information presented herein. All Images of products shown in this document are indicative only. The actual products may differ from the displayed image. No rights can therefore be derived from the images shown. For more information contact us at info@movexx.com.

movexx
smart electric tugs

Generatorstraat 17-19
3903 LH Veenendaal
The Netherlands

T +31 (0)318 51 99 00
E info@movexx.com
I www.movexx.com